GFSA-PB

Phone Storage Box

Organized, lockable storage for up to 36 phones in a compact, portable enclosure, built to create calm, focused, phone-free classrooms. Mount it on a wall, lock it to a cart, or set it on a desk.



Wall-mount | **On a cart** | **Free-standing**

Getting started checklist

PRODUCT SET-UP

- [ ] Unbox your new Generation Faraday Phone Box.
- [ ] Choose your deployment: wall-mount the unit or utilize the full cart system (page 4).
- [ ] Change the combination from the factory 1-1-1-1.
- [ ] Train staff & students on usage with phone policy implementation.

GENERATION FARADAY APP

- [ ] Download the app and create your account.
- [ ] Invite users.
- [ ] Upload students.
- [ ] Scan the RFID tag with your phone, or search the serial number, to pull up the cabinet details and assign students.

IN THIS GUIDE

01 Start
Overview & getting-started checklist

02 Lock
Combination lock instructions

03 Use
Everyday use & care

04 Deploy
Wall-mount or expand the system


Combination lock Instructions

Factory code 1·1·1·1


POSITIONS **Unlock** **Lock** **Change codes**

Tip: Use the master key to unlock without the combination.

1 · Lock and unlock




1. Enter 1-1-1-1, turn 90° clockwise to unlock.

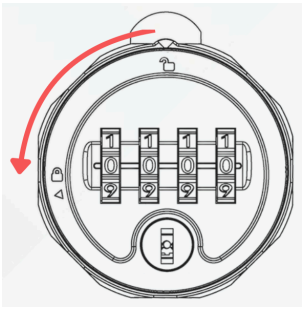


2. Turn 90° counter-clockwise to lock; resets to 0-0-0-0.


2 · Set a new code

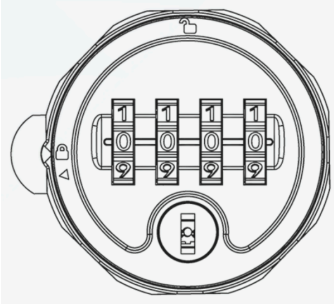

1. Enter the correct (current) code.

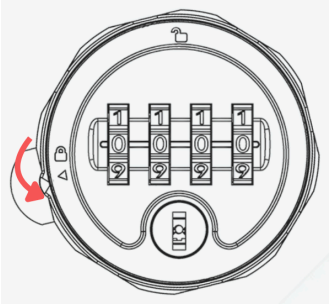


2. Turn 10° counter-clockwise to the triangle.

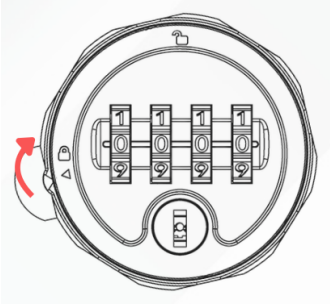


3. Set a new code, then turn back to lock.

3 · Find current codes

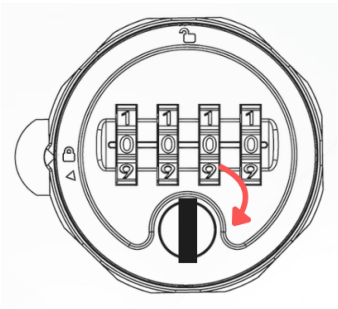

1. Insert the master key and twist 90°.

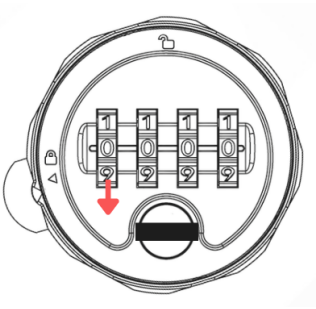

2. Turn dials top to bottom until they stop; read code, pull key.

DAILY OPERATION

Everyday use & care

A simple daily routine

1. Assign each student a numbered slot for fast, accountable check-in and return.
2. Open the cabinet and place each phone in its own compartment.
3. Lock the box with the combination. If using the ClassKeeper Phone Storage Cart & Cords, thread the cable through the metal handle on the top of each phone box and around a vertical pole of the cart, then lock securely.
4. Monitor devices at a glance through the transparent door throughout the session.
5. Unlock and return each phone to its owner at the end of the session.





Maintenance & care

Clean

Wipe surfaces with a dry or slightly damp cloth. Avoid harsh chemicals or abrasives.

Check the lock

Confirm the combination if needed and keep the Master Key stored securely off-site.

Store dry

Keep the enclosure dry. Inspect the foam insert and slots for debris.


GENERATION FARADAY APP

Track it digitally

Monitor every cabinet, assignment, and student in the app. Available on iOS, Android, and desktop.

1. Set up your account.
2. Scan the RFID tag in the app, holding your phone against the "scan here" mark on the cabinet.
3. Name the cabinet, assign up to 36 students, then track assignments, compliance, and device condition in the app.

Download it on the App Store or Google Play, or visit app.generationfaraday.com in your browser.

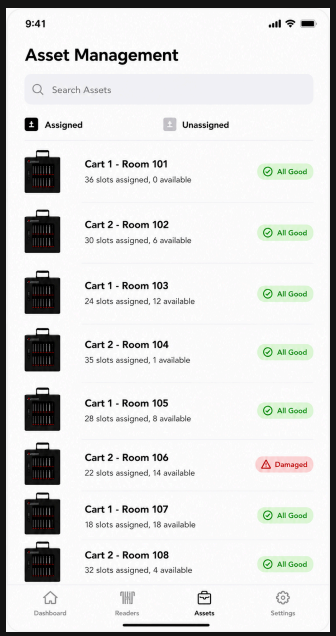


DEPLOYMENT OPTIONS

Wall-mount it, or expand the system


Mount a single unit to the wall, or expand the system with the cart, cable, and Faraday cover.

OPTION A Wall-mount the unit


Phillips screwdriver · drill with 5/16″ bit

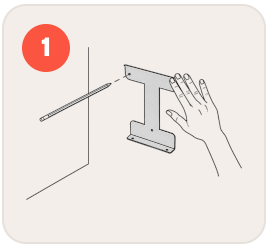


Hold wall mount plate in position and mark the three holes.

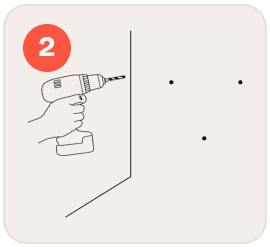


Pre-drill three 5/16″ holes where marked and insert wall anchors.

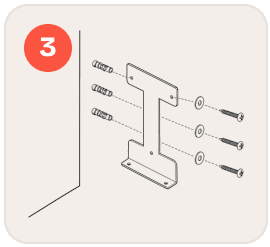

Attach plate to the wall with included washers and screws.

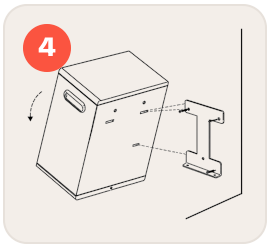

Tilt Phone Storage Box and hang it onto the lip of the wall mount plate.

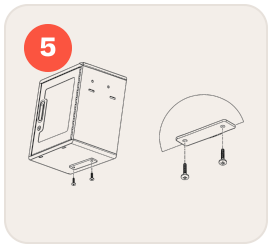

Secure the Phone Storage Box from the bottom with two included M5 x 12mm screws. For high security, replace two screws with permanent hardware.

OPTION B Expand the system



ClassKeeper Cart

Secure up to eight boxes per cart (288 phones) for mobile, room-to-room deployment.



Security Cable

Lock a single unit or tether multiple boxes together to prevent theft or tampering.



Faraday Cover

Add a signal-blocking cover to cut off notifications. Works over individual boxes. Compatible with the cart, not the security cable.

ONBOARDING & SUPPORT

We'll help you roll out

Questions on deployment, quantities, or lead times? Your Generation Faraday contact is ready to help.

EMAIL
support@generationfaraday.com

GET IN TOUCH
generationfaraday.com/get-in-touch

CLASSKEEPER CART

Set up the ClassKeeper Cart

The 3-tier cart secures up to 8 Phone Storage Boxes for mobile, room-to-room deployment. Assemble it in six steps, then load and lock.

TOOLS NEEDED

- Hex key for M8
- Phillips screwdriver for M5
- M5 & M8 wrench / nut driver



Assembly in six steps

1. **Fit the casters (H, I).** The bottom shelf (A) is the one with caster mounting holes underneath. Flip it over and bolt on the four casters. Use one M8 pan-head screw with a spring washer and a flat washer per hole, four screws per caster. Keep both locking casters (I) on the same short side.
2. **Fit the center guide rails (E).** Attach a shelf divider down the center of the bottom (A) and middle (B) shelves with the M5 countersunk screws and nuts: five on the middle divider and three on the bottom.
3. **Bracket the bottom shelf (D).** Lay the shelves on their side and fasten each vertical bracket to the bottom shelf (A) with M8 pan-head screws, spring washers, and flat washers, two per side (eight total). Make sure the end with the extra holes is on top, for the the armrest-bracket (F) installation in step 5.
4. **Bracket the middle and top shelves (D).** Fasten the brackets to the middle (B) and top (C) shelves with M8 pan-head screws and lock nuts (sixteen total). Note the top shelf (C) doesn't have any holes in the center for a center guide rail.
5. **Install the handle (G).** Stand the cart upright. Fasten the handrail tube into the armrest brackets (F) with M8 pan-head screws, spring washers, and flat washers (two of each). Then secure the armrest brackets to the vertical brackets (D) with M8 pan-head screws and lock nuts (four of each).
6. **Load and lock.** Seat eight Phone Storage Boxes, all facing outward: four on the bottom shelf (A) and four on the middle shelf (B). Optionally thread the security cable through each unit's handle and around a vertical bracket (D). Set the caster brakes (I) before use.

PARTS KEY

A	B	C	D	E
Bottom shelf ×1	Middle shelf ×1	Top shelf ×1	Vertical bracket ×4	Center Guide Rail ×2
F	G	H	I	
Armrest bracket ×2	Handrail tube ×1	Swivel caster ×2	Locking caster ×2	

HARDWARE KIT

M8 pan-head screw	46
M8 spring washer	26
M8 flat washer	26
M8 lock nut	20
M5 countersunk screw	8
M5 nut	8